

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>E21B 19/16</b>	<b>A1</b>	(11) International Publication Number: <b>WO 98/32948</b>
		(43) International Publication Date: <b>30 July 1998 (30.07.98)</b>
(21) International Application Number: <b>PCT/GB98/00282</b>	(81) Designated States: AU, CA, CN, JP, NO, US, European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: <b>29 January 1998 (29.01.98)</b>		
(30) Priority Data: <b>9701758.6</b> <b>29 January 1997 (29.01.97)</b> <b>GB</b>	<b>Published</b> <i>With international search report.</i>	
(71) Applicants (for all designated States except US): WEATHER-FORD/LAMB, INC. [US/US]; c/o CSC-The United States Corporation Company, 1013 Centre Road, Wilmington, DE 19805 (US). LUCAS, Brian, Ronald [GB/GB]; 135 Westhall Road, Warlingham, Surrey CR6 9HU (GB).		
(72) Inventor; and (75) Inventor/Applicant (for US only): PIETRAS, Bernd-Georg [DE/DE]; Sandriedeweg 12, D-30900 Wedemark (DE).		
(74) Agent: LUCAS, Brian, Ronald; Lucas & Co., 135 Westhall Road, Warlingham, Surrey CR6 9HU (GB).		

(54) Title: APPARATUS AND METHOD FOR ALIGNING TUBULARS

(57) Abstract

An apparatus for aligning tubulars comprises a guide (217) and a socket centralizer (230) which are mounted on opposite sides of a power tong (202). In use, the power tong (202) is lowered so that the socket centralizer (230) lies circumjacent the socket (215) of a lower length of casing (220) and an upper length of casing (228) is lowered so that its pin (229) is brought into alignment with the socket (225) by the guide (217). The power tong (202) is then raised and the jaw assemblies applied to grip the upper length of casing (228) which is then rotated to screw the pin (229) into the socket (225) and make up the joint to the required torque.

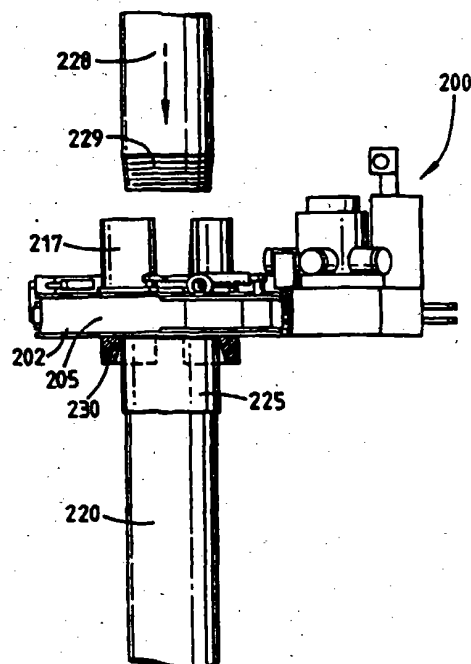

APPARATUS AND METHOD FOR ALIGNING TUBULARS

This invention relates to an apparatus and a method for aligning tubulars.

During the construction, maintenance and repair of oil and gas wells it is necessary to connect a large number of tubulars, for example lengths of drill pipe and casing. Conventionally the upper end of a tubular is provided with a threaded socket whilst the lower end is provided with a threaded pin which is slightly tapered.

In practice it is very easy for the pin of one tubular to be incorrectly inserted into the socket of an adjacent tubular with the result that the threads on one or both the pin and the socket can readily be damaged.

Considerable skill is required to correctly align tubulars and historically this task has been undertaken by a highly experienced rig-hand called a "stabber".

In order to facilitate correct alignment a device known as a "stabbing guide" is frequently used. One such stabbing guide comprises a plastic body member which can be mounted on the socket of a pipe held in slips. The plastic body member has a central passageway the upper part of which defines a funnel which leads into a lower passageway which is concentric with the socket. In use, as the upper tubular is lowered, its pin enters the funnel of the stabbing guide and then travels down the lower passageway into the socket. The stabbing guide (which comprises two semi-circular pieces hinged together around the socket) is then removed and the tubulars are screwed together and tightened to the required torque either by a power tong or a tong assembly comprising a power tong and a backup tong.

In order to simplify the stabbing operation the present invention provides an apparatus for aligning tubulars which apparatus comprises a guide mounted on

one of a power tong and a backup tong.

In one embodiment said apparatus further comprises a socket centralizer mounted on said one of said power tong and said backup tong.

5        Preferably, said one of said power tong and said backup tong is said power tong.

In another embodiment, said apparatus comprises a power tong and a backup tong, wherein said guide is mounted on said power tong and means are provided to  
10 maintain said power tong and said backup tong in a certain juxtaposition during a stabbing operation.

Preferably, said means comprises locating rods on one of said power tong and said backup tong and blocks shaped to receive at least the ends of said locating  
15 rods on the other of said power tong and said backup tong.

Advantageously, said backup tong is provided with at least two prismatic jaw assemblies to locate said backup tong in fixed juxtaposition with respect to a  
20 tubular being gripped.

The present invention also provides methods for aligning tubulars as set out in Claims 7 and 8 hereto.

\* \* \*

25

30

35

For a better understanding of the present invention reference will now be made, by way of xampl , to the accompanying drawings, in which:-

5      Figure 1a is a side elevation of a conventional tong assembly;

        Figure 1b is a top plan view of the tong assembly shown in Fig. 1a;

10      Figure 2a is a side elevation of a first embodiment of an apparatus in accordance with the present invention;

        Figure 2b is a top plan view of the apparatus shown in Fig. 2a;

15      Figure 3a is a side view of the components of a guide forming part of the apparatus shown in Figs. 2a and 2b;

        Figure 3b is a top plan view of the guide shown in Fig. 3a;

        Figure 3c is a section on line IIIc-IIIc of Fig. 3b;

20      Figure 4 is a top plan view of the backup tong forming part of the apparatus shown in Figs. 2a and 2b with certain parts removed for clarity;

        Figure 5 is a side elevation of the apparatus shown in Figs. 2a and 2b in a first position;

25      Figure 6 is a side elevation of the apparatus shown in Figs. 2a and 2b in a second position;

        Figure 7 is a side elevation of the apparatus shown in Figs. 2a and 2b in a third position;

30      Figure 8 is a side elevation of the apparatus shown in Figs. 2a and 2b in a fourth position;

        Figure 9 is a side elevation of the apparatus shown in Figs. 2a and 2b in a fifth position;

35      Figure 10 is a side elevation of a second embodiment of an apparatus in accordance with the present invention;

Figure 11 is a side elevation of a third embodiment of an apparatus in accordance with the present invention; and

5 Figure 12 is a perspective view of a fourth embodiment of an apparatus in accordance with the present invention.

Referring to Figures 1a and 1b of the drawings there is shown a conventional tong assembly which is generally identified by the reference numeral 1.

10 The tong assembly 1 comprises a power tong 2 and a backup tong 3.

The power tong 2 comprises a pair of gates 4, 5 which are held together in the position shown by latch 6. When the latch 6 is released the gates 4, 5 can be  
15 swung open by admitting hydraulic fluid to piston and cylinder assemblies 7 and 8. The power tong 2 also contains a rotary 9 which is provided with four jaw assemblies 10. The rotary 9 can be rotated by a hydraulic motor 11.

20 The backup tong 3 is provided with two gates 12, 13 which are held together by latch 14 but which, when latch 14 is released can be swung to an open position.

In use, a lower length of casing (not shown), the upper end of which is provided with a socket, is gripped  
25 by slips. A stabbing guide is mounted on the socket and the pin of an upper length of casing is lowered into the stabbing guide.

Once the pin is correctly located the stabbing guide is removed. The gates 4, 5 of the power tong 2 and  
30 the gates 12, 13 of the backup tong 3 are then opened and the tong assembly 1 moved towards the casing until the lower length of casing lies within the backup tong 3 and the upper length of casing lies within the power tong 2. The gates 4, 5, 12, 13 are then closed and  
35 latched. Jaw assemblies in the backup tong are then

so as to guide the pin of an upper casing to the centre of the opening of the power tong 102.

Referring now to Figure 4, the backup tong 103 is provided with three prismatic jaw assemblies 119a, 119b and 119c which, when actuated, hold a lower length of casing 120 in a fixed position relative to the backup tong 103.

As shown in Figure 5 the backup tong 3 is provided with three upwardly extending locating rods 121 which are each provided with a conical tip 122. Similar, the underside of the power tong 102 is provided with three blocks 123 each of which is provided with a recess 124 shaped to receive the conical tip 122 of a respective locating rod 121.

In use, the lower length of casing 120 is first secured by slips on the rig floor in the usual manner. The gates 112 and 113 of the backup tong 103 are then opened and the tong assembly 101 moved into position with the backup tong 103 circumjacent the lower length of casing 120 and immediately below the socket 125 thereof.

The gates 112 and 113 are then closed by hydraulic piston and cylinder assemblies 126 and 127 and the latch 114 closed. The prismatic jaw assembly 119a is fixed whilst prismatic jaw assemblies 119b and 119c are automatically advanced by a predetermined distance when the latch 114 is closed. This grips the lower length of casing firmly and also ensures that the backup tong 3 is in a fixed position relative to the lower length of casing 120. The position thusfar attained is shown in Fig. 5.

At this time pneumatic lifting cylinder 115 is extended which lowers the backup tong 3. The conical tips 122 of the locating rods 121 enter the recesses 124 of the blocks 123 and thus locate the power tong 2 with

respect to the backup tong 3. This in turn locates the guide 117 with respect to the lower length of casing 120 so that the centre of the guide 117 is coaxial with the axis of the lower length of casing 120. This position is shown in Fig. 6.

At this time the upper length of casing 128 is lowered into the proximity of the guide 117. As shown in Fig. 7 the lower end of the upper length of casing 128 is provided with a pin 129 which is tapered.

As the upper length of casing 128 is further lowered the pin 129 enters the guide 117 and is centred thereby. It then passes downwardly until it enters the socket 125 as shown in Fig. 8.

The power tong 102 is then raised so that the blocks 123 are well clear of the locating rods 121. At this point the jaw assemblies in the power tong 102 are applied to the upper length of casing 128 and the hydraulic motor 111 actuated to rotate the rotary and screw the pin 129 into the socket 125. During the procedure the power tong 102 moves towards the backup tong 103. However, even when the joint is tightened to the required torque the blocks 123 still lie a short distance above the conical tips 122 of the locating rods 121.

At this stage the jaw assemblies of both the power tong 102 and the backup tong 103 are relaxed, the gates 104, 105, 112 and 113 opened and the tong assembly 101 retracted in preparation for the casing being lowered. It will be noted that one component 118 of the guide 117 is mounted on each of the gates 104, 105 and accordingly the guide 117 opens and closes with the gates 104, 105.

For certain applications a backup tong is not required, for example where the power tong can conveniently be restrained by a chain attached to the drilling tower.

Figur 10 shows an apparatus in accordance with the present invention which is generally identified by the reference numeral 200.

5 The apparatus 200 comprises a power tong 202 which is generally similar to the power tong 2. The basic construction of the power tong 202 is similar to the power tong 2 and parts having similar functions have been identified by the same reference numeral in the "200" series.

10 The main differences are that the apparatus 200 does not include a backup tong and that it is provided with a guide 217 and a socket centraliser 230.

15 In use, the lower length of casing 220 is first secured by slips (not shown) with the socket 225 facing upwardly close to the slips.

The power tong 202 is then lowered onto the socket 225 so that the socket 225 enters the socket centraliser 230 and aligns the socket centraliser 230, the socket 225 and the guide 217.

20 The upper length of casing 228 is then lowered so that its pin 229 enters the guide 217, is centred thereby and enters the socket 225. At this point power tong 202 is raised. Its jaw assemblies are then advanced to grip the upper length of casing 228 which is then rotated to screw the pin 229 into the socket 225.

25 Once the joint is tightened to the required torque the gates 204, 205 are opened and the power tong 202 withdrawn.

30

\* \* \*

The embodiment shown in Fig. 11 is generally similar to that shown in Fig. 10 except that the apparatus 300 also includes a backup tong 303.

35 Since the upper length of casing 328 and the lower



length of casing 320 are being aligned by the guide 317 and the socket centraliser 330 no special arrangements need be made for aligning the power tong 302 and the backup tong 303.

5       The procedure for connecting the upper length of casing 328 to the lower length of casing 320 is as follows.

Firstly, the lower length of casing 320 is secured in slip (not shown).

10       The gates 312, 313 of the backup tong are then opened and the apparatus 300 manoeuvred so that the lower length of casing 320 is disposed within the backup tong 303.

15       The power tong 302 is then lowered until the socket 325 on the lower length of casing 320 is received within the socket centraliser 330.

20       The upper length of casing 328 is then lowered until the pin 329 passes through guide 317 and enters the socket 328. Only at this stage are gates 312, 313 closed and the jaw assemblies of the backup tong 303 activated to grip the lower length of casing 320.

25       The power tong 302 is then raised and its jaw assemblies activated to grip the upper length of casing 328 which is then rotated to cause the pin 329 to enter the socket 325 and the joint to be tightened to the desired torque.

The jaw assemblies are then relaxed and the gates 304, 305, 312, 313 of the power tong 302 and the backup tong 303 opened prior to retracting the apparatus 300.

30       Various modifications to the embodiments described are envisaged, for example, if desired, the guide and the socket centraliser could be mounted on the backup tong 303 rather than the power tong 302. Alternatively, the guide could be mounted on the backup tong without a  
35       socket centraliser. Such an arrangement is shown in

Fig. 12.

\* \* \*

5       The embodiment shown in Fig. 12 is generally similar to that shown in Fig. 1a and 1b and parts of the tong assembly 401 similar to the tong assembly 1 have been identified by similar reference numerals in the "400" series.

10       The main difference is that the top of the backup tong 403 is provided with a guide 417.

      In use, the lower length of casing 420 is first secured by stops 431 on the rig floor in the usual manner. The gates 412 and 413 of the backup tong 403 are  
15       then opened. Since two of the four components 418 of the guide 417 are mounted on the gates 412 and 413 the guide 417 opens with the gates 412 and 413 so that the lower length of casing 420 can enter the backup tong 403 when the carriage 432 which supports the apparatus 400 is  
20       advanced towards the casing 420 on rails 433.

      When the lower length of casing 420 is fully within the backup tong 403 the gates 412 and 413 are closed. The components 418 of the guide 417 have a stepped interior (not visible in Figure 12) so that the lower  
25       part of each component 418 touches the socket on the top of the lower length of casing 420 whilst the upper part of the interior of each component 418 tapers inwardly to form a funnel. Once the lower length of casing 420 has been gripped the upper length of casing 428 is lowered  
30       through the power tong 402 towards the lower length of casing 420. The guide 417 guides the pin on the bottom of the upper length of casing 428 into the socket. The power tong 402 is disposed a small distance above the guide 417. Once the pin of the upper length of casing  
35       428 has entered the socket on the lower length of casing

the jaws of the power tong 402 are applied to the upper  
length of casing 428 which is rotated until the joint  
reaches the desired torque. Thereafter, gates 404, 405,  
412, 413 are opened and the assembly 400 retracted on  
5 the carriage 432.

10

15

20

25

30

35

ABSTRACT

Apparatus and Method for Aligning Tubulars

An apparatus for aligning tubulars comprises a guide (217) and a socket centralizer (230) which are  
5 mounted on opposite sides of a power tong (202). In  
use, the power tong (202) is lowered so that the socket  
centralizer (230) lies circumjacent the socket (215) of  
a lower length of casing (220) and an upper length of  
casing (228) is lowered so that its pin (229) is brought  
10 into alignment with the socket (225) by the guide (217).  
The power tong (202) is then raised and the jaw assem-  
blies applied to grip the upper length of casing (228)  
which is then rotated to screw the pin (229) into the  
socket (225) and make up the joint to the required  
15 torque.

(Fig. 10)

20

25

30

35

FIG. 1a

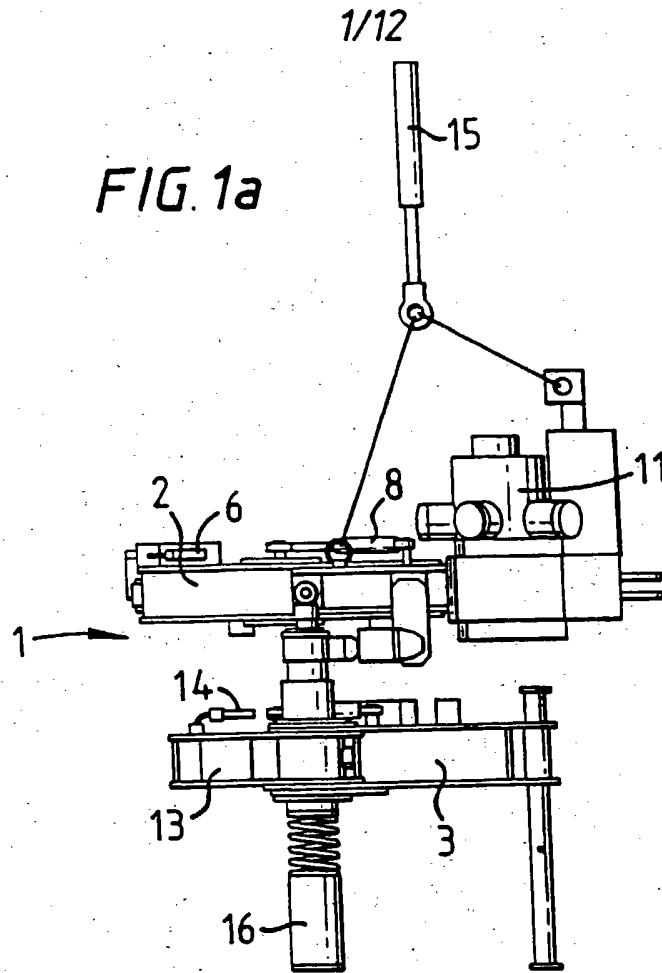
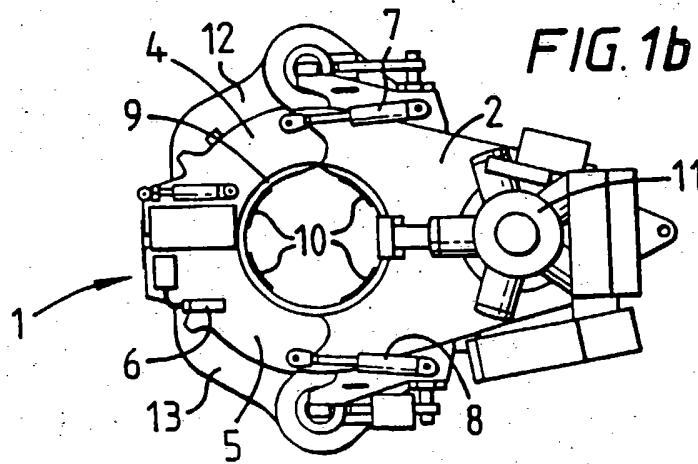


FIG. 1b



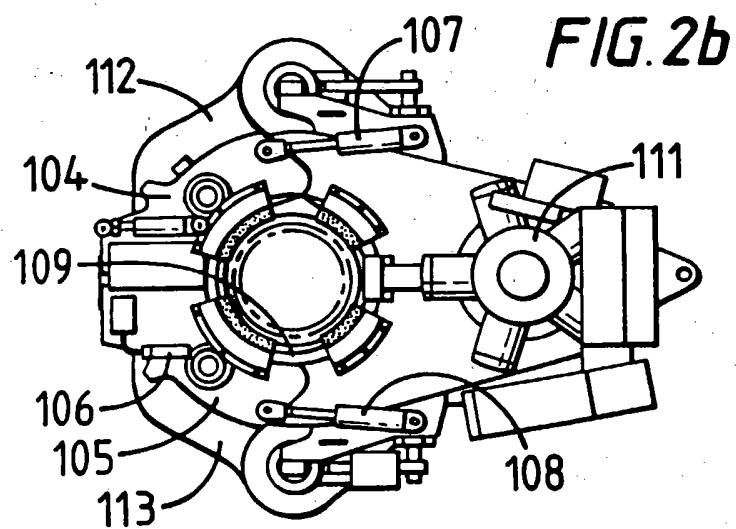
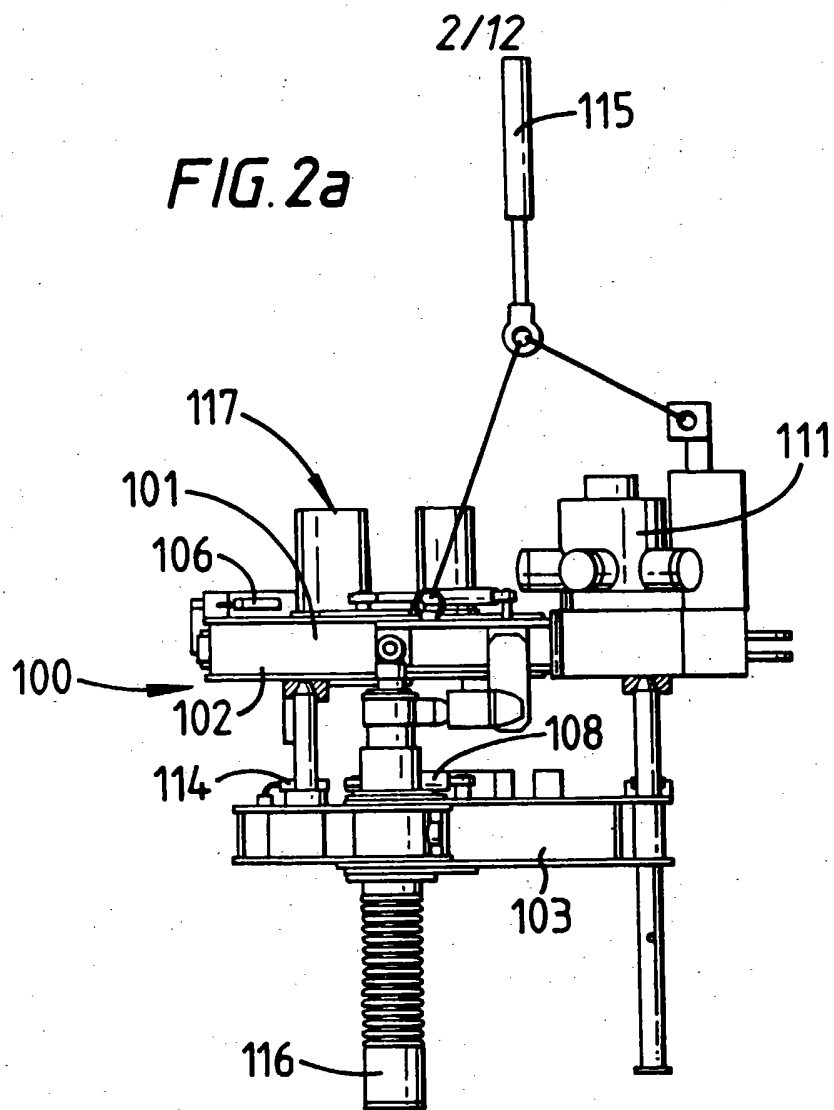


FIG. 3a




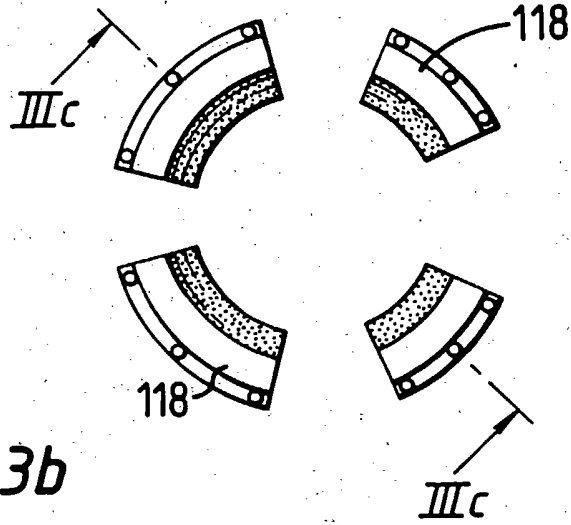


FIG. 3b

FIG. 3c



**FIG. 4**

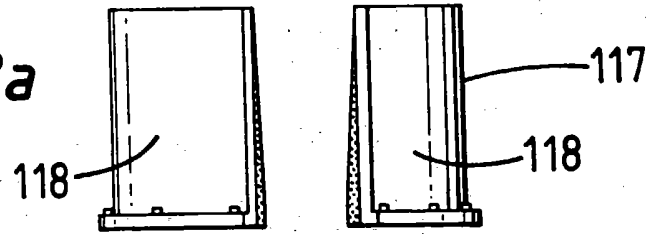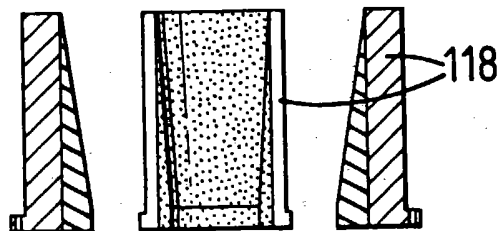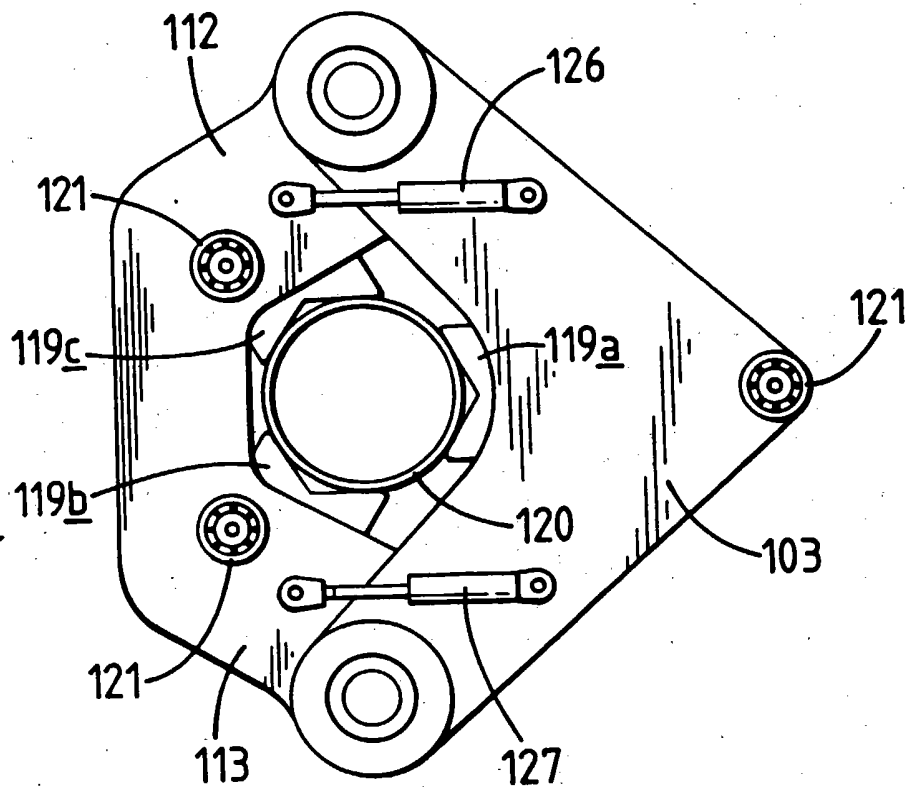

5/12

FIG. 5

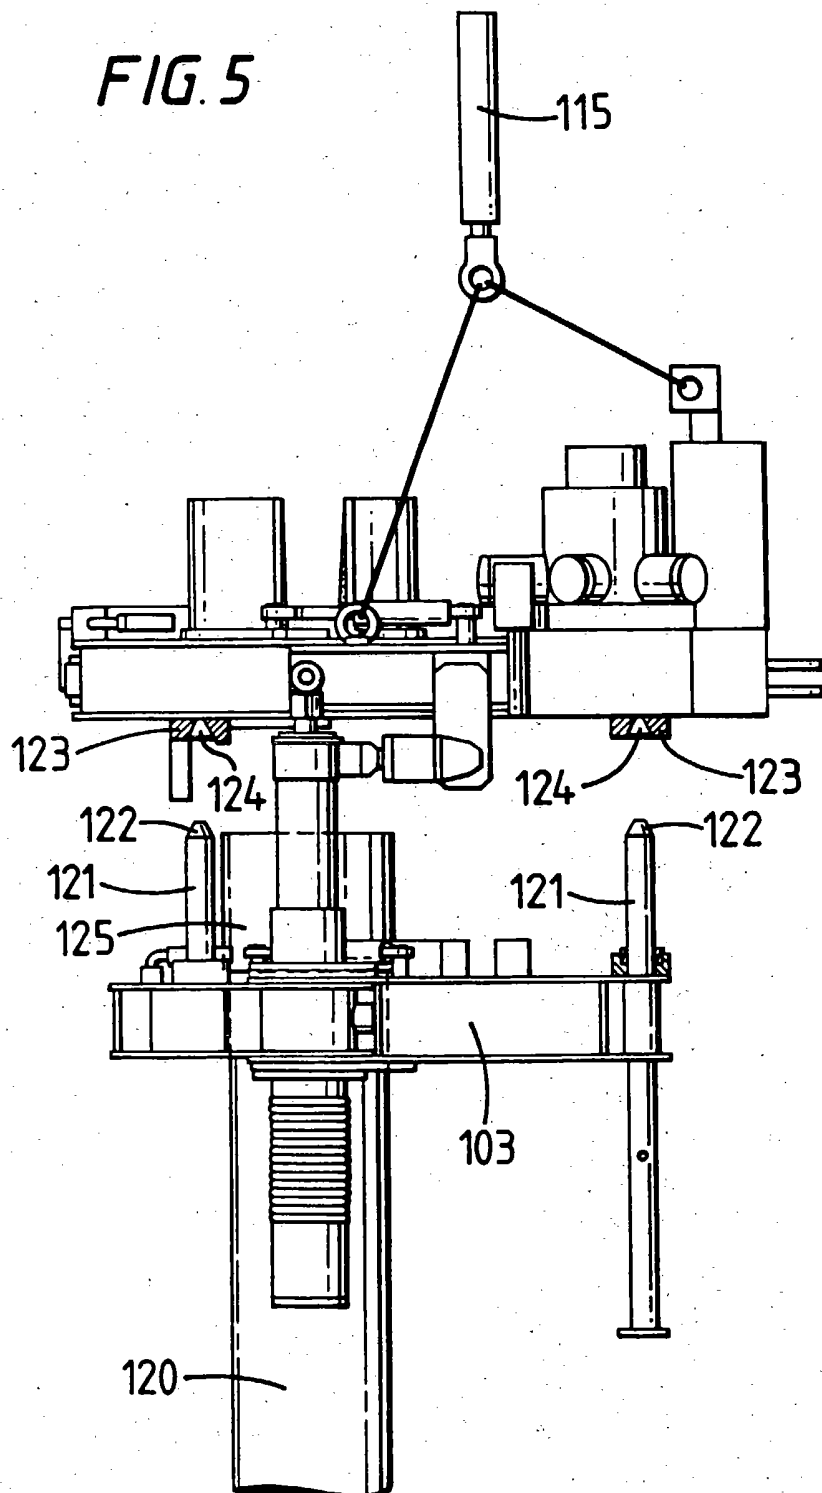


FIG. 6

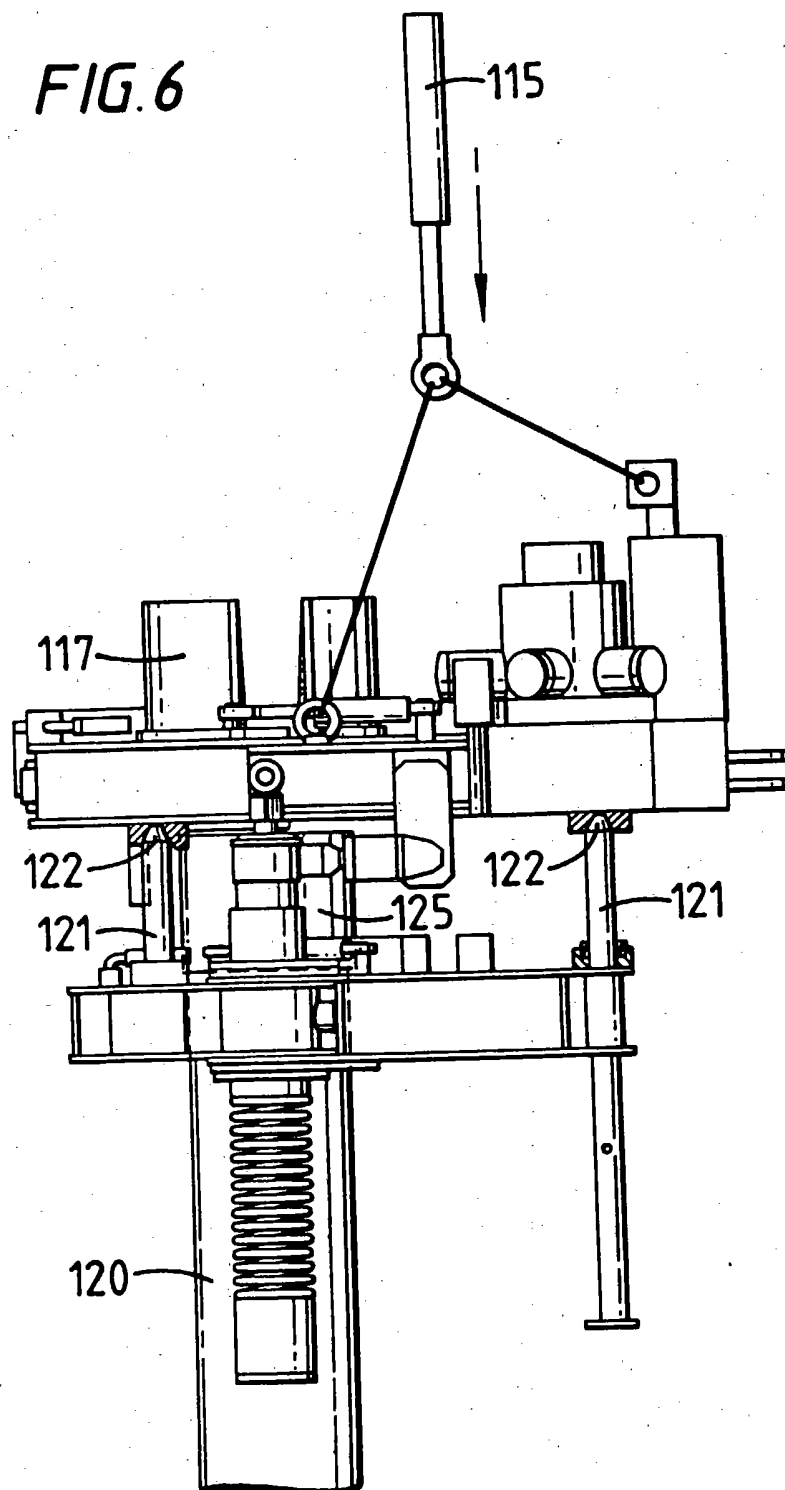


FIG. 7


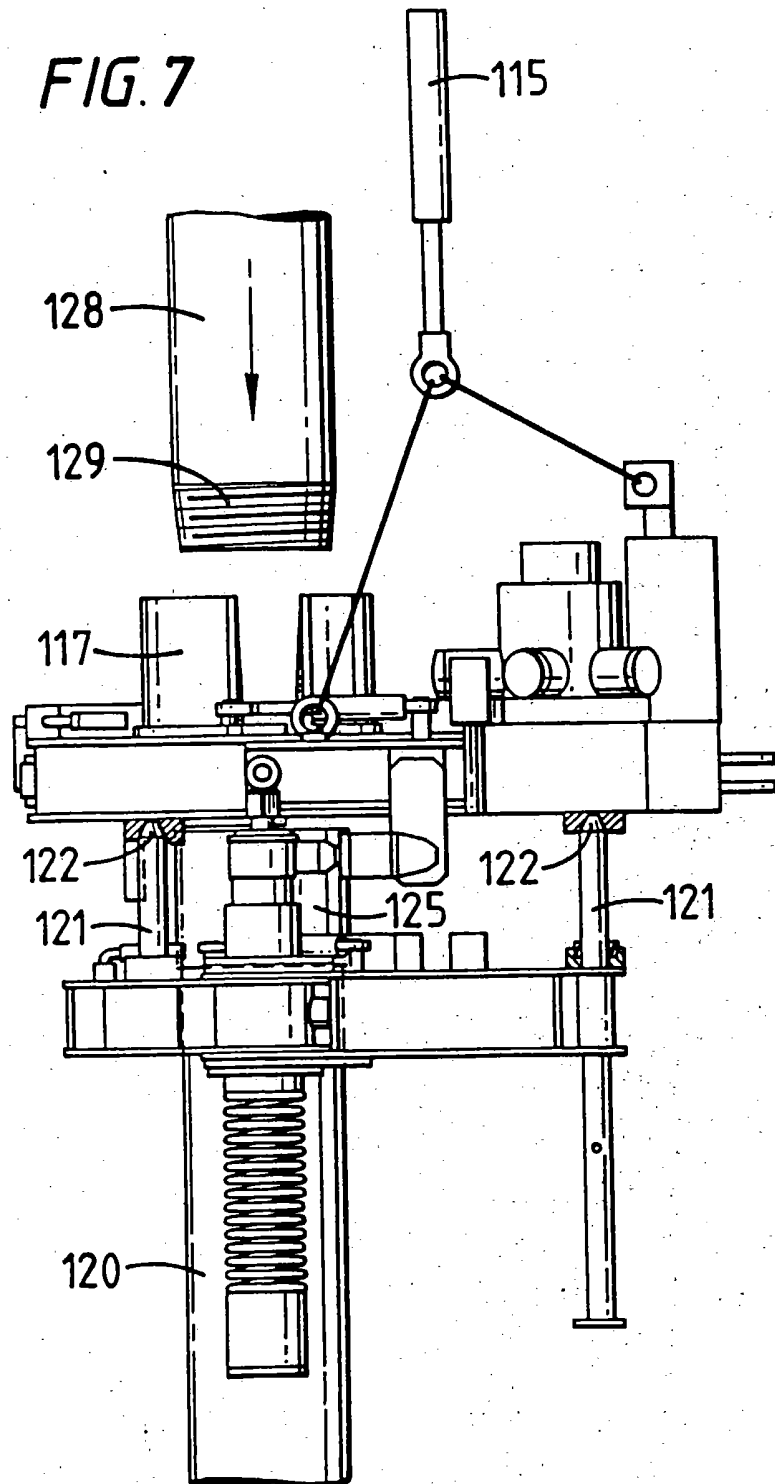


FIG. 8

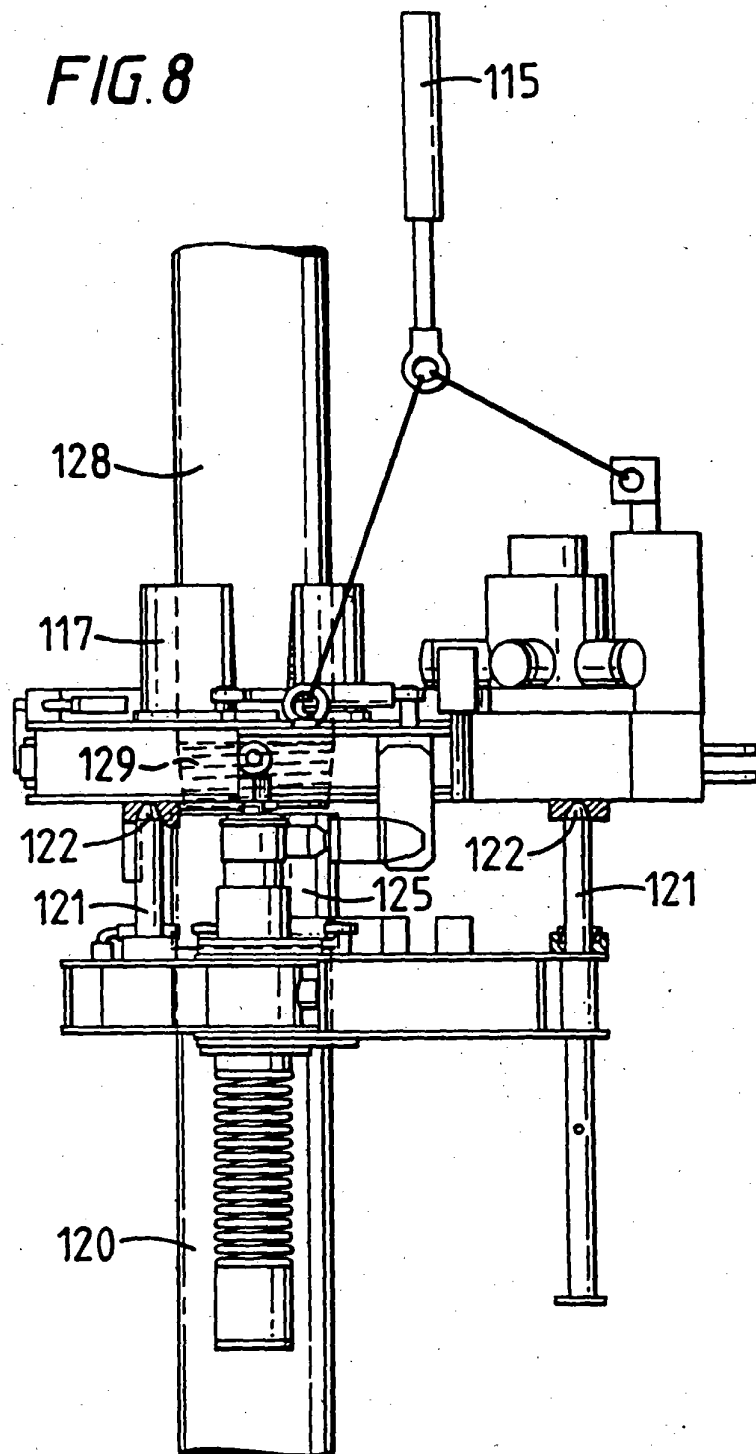

9/12

FIG. 9

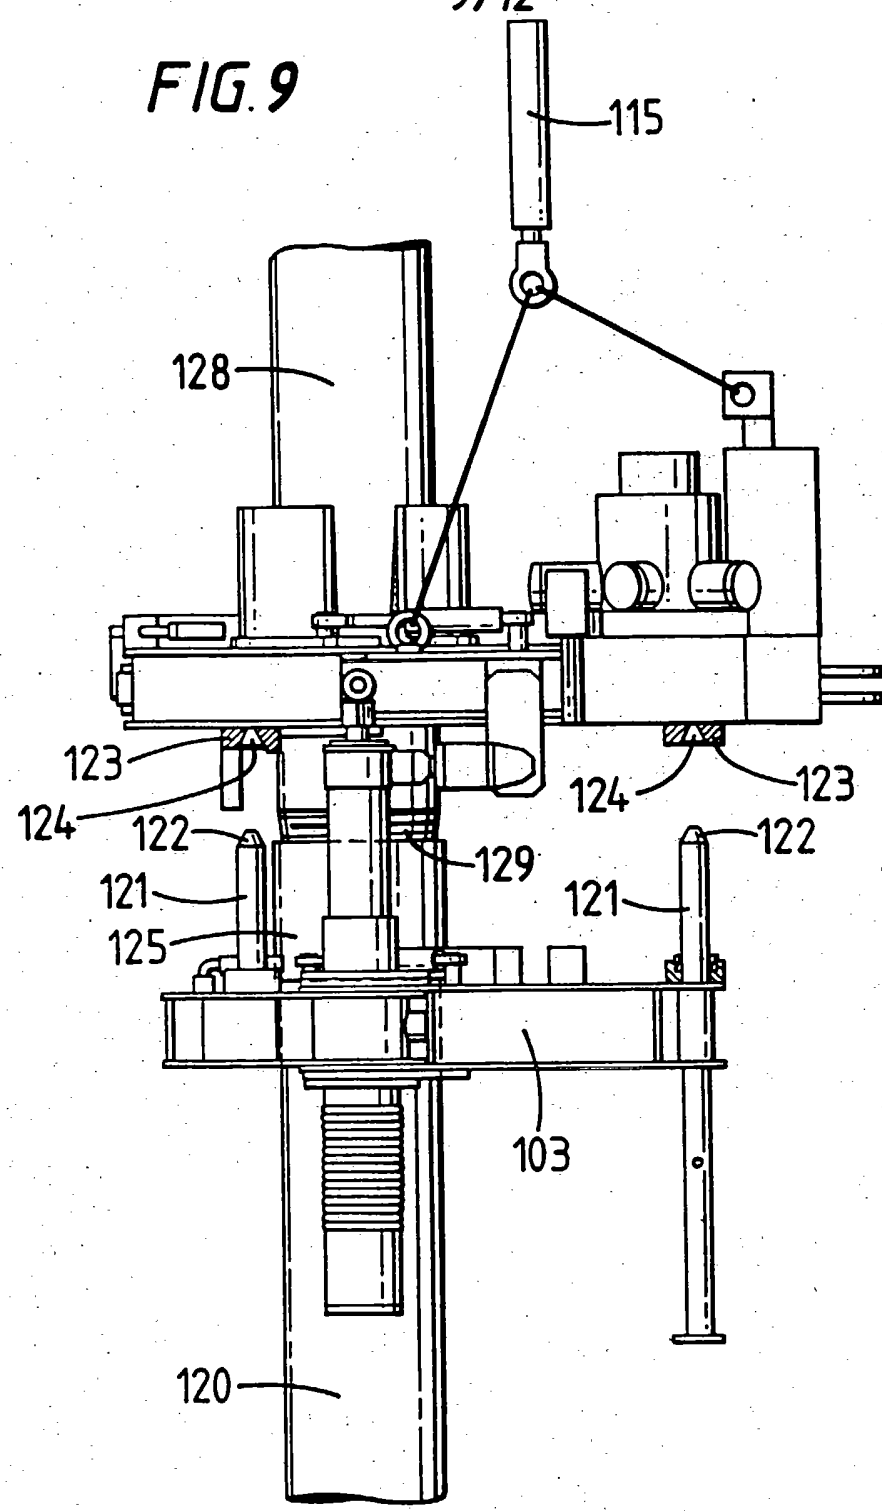


FIG. 10



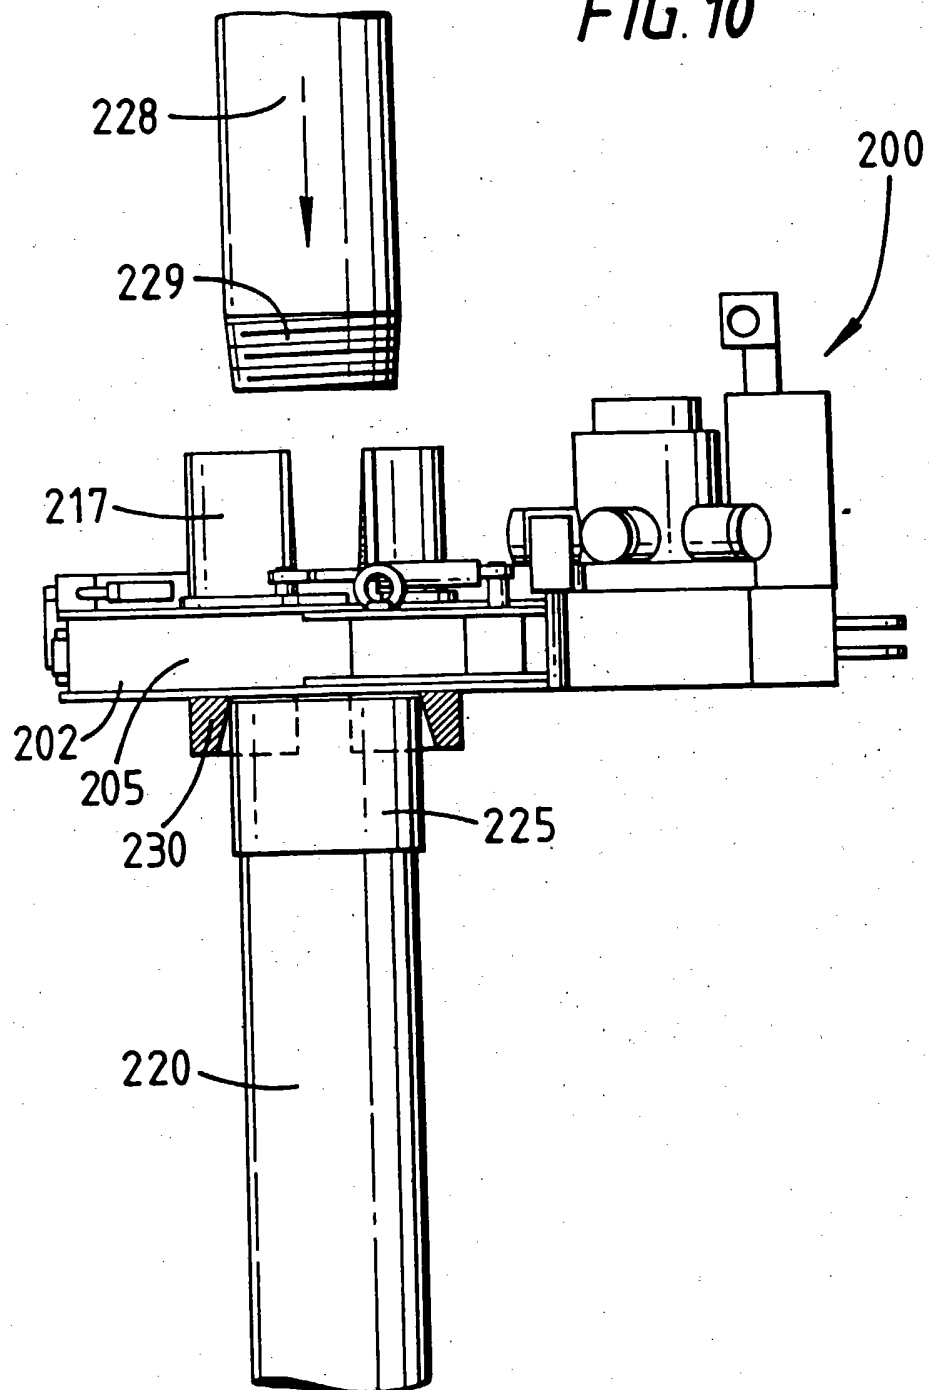


FIG. 11



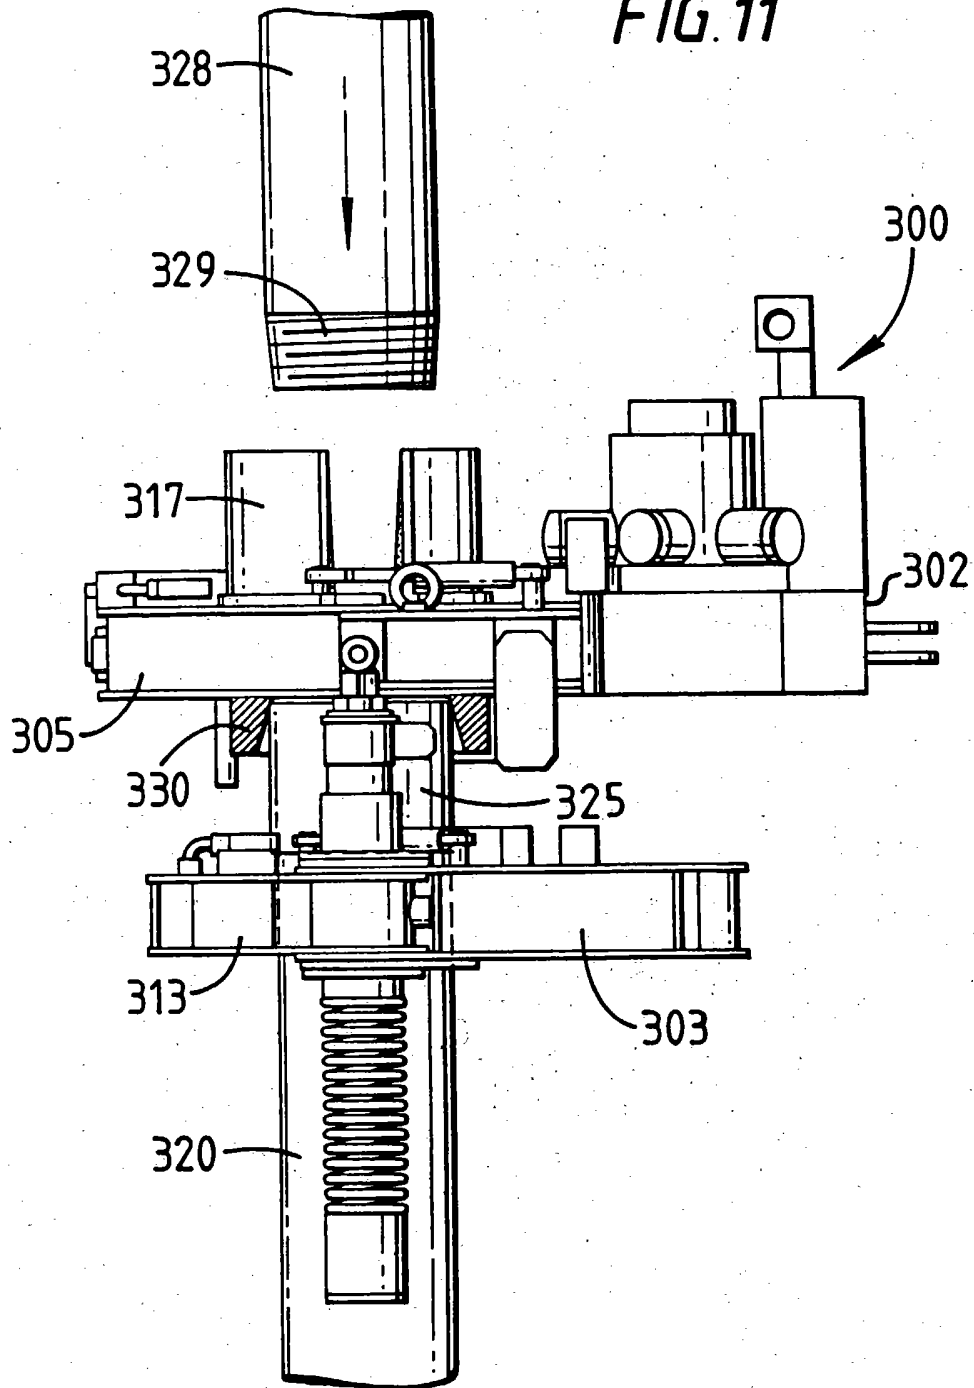

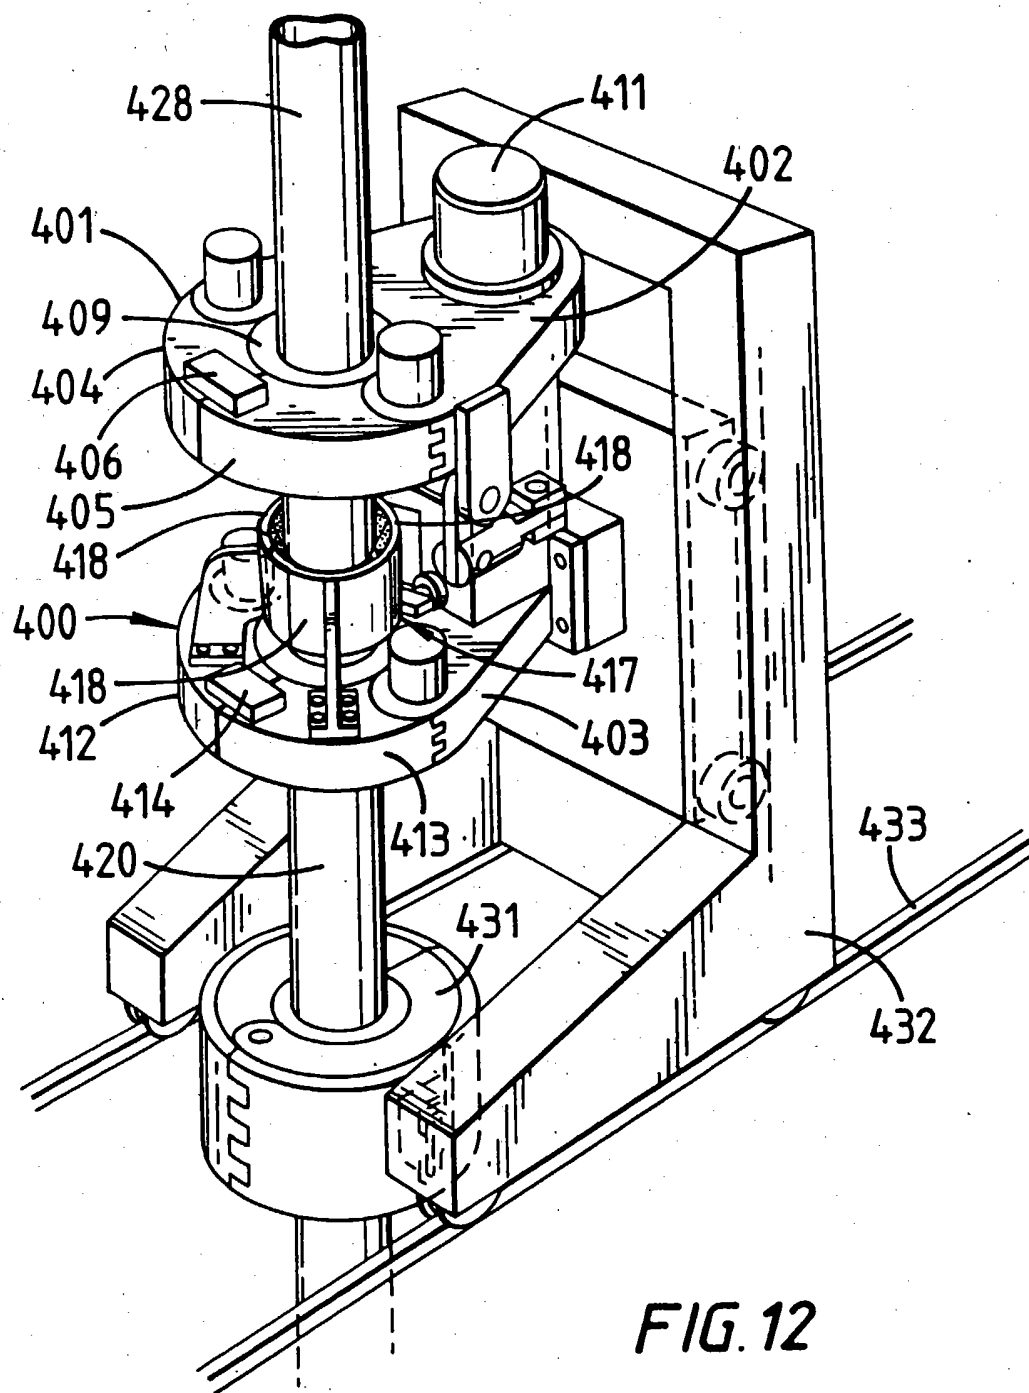

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB 98/00282

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> IPC 6 E21B19/16		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) IPC 6 E21B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	US 3 881 375 A (KELLY ROBERT R) 6 May 1975 see column 1, line 11 - line 22; figures 1,2	1,3,4 2,6
Y	US 4 599 778 A (DREYFUSS WILFRIED ET AL) 15 July 1986 see abstract; figures	2
X Y	US 3 635 105 A (DICKMANN JOHN L ET AL) 18 January 1972 see column 3, line 65 - column 4, line 7; figures 3-5	1,3 6
X	US 3 589 742 A (FLICK HOWARD S) 29 June 1971 see column 1, line 5 - line 11; figures 3,6 see column 3, line 6 - line 20; figure 3	1,3
-/--		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "S" document member of the same patent family		
Date of the actual completion of the international search  8 May 1998		Date of mailing of the international search report  15/05/1998
Name and mailing address of the ISA European Patent Office, P.B. 5816 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl. Fax: (+31-70) 340-3016		Authorized officer  Weiland, T

Form PCT/ISA/210 (second sheet) (July 1992)

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter-  
national Application No  
PCT/GB 98/00282

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 3881375 A	06-05-1975	AT 333685 B	10-12-1976
		AT 326592 B	29-12-1975
		CA 984374 A	24-02-1976
		CA 984910 A	02-03-1976
		DE 2357603 A	20-06-1974
		FR 2327386 A	06-05-1977
		GB 1416245 A	03-12-1975
		JP 49089604 A	27-08-1974
		NL 7316566 A	14-06-1974
US 4599778 A	15-07-1986	US 3882377 A	06-05-1975
		DE 3315752 A	08-11-1984
		DE 3331867 A	21-03-1985
		EP 0124117 A	07-11-1984
		CA 1266963 A	27-03-1990
		JP 1746671 C	25-03-1993
		JP 4034038 B	04-06-1992
		JP 60060391 A	06-04-1985
US 3635105 A	18-01-1972	DE 3315752 A	08-11-1984
		DE 3331867 A	21-03-1985
		EP 0124117 A	07-11-1984
		CA 1266963 A	27-03-1990
		JP 1746671 C	25-03-1993
		JP 4034038 B	04-06-1992
		JP 60060391 A	06-04-1985
US 3589742 A	29-06-1971	AT 291887 A	15-07-1971
		DE 1783026 A	29-11-1973
		FR 1589329 A	23-03-1970
		GB 1226856 A	31-03-1971
		GB 1226859 A	31-03-1971
		GB 1226860 A	31-03-1971
		US 3483774 A	16-12-1969
US 3576062 A	27-04-1971	AT 300696 A	15-07-1972
		DE 2040241 A	25-02-1971
		FR 2059040 A	28-05-1971
		GB 1301560 A	29-12-1972
US 4213237 A	22-07-1980	NL 7012243 A	23-02-1971
		NONE	
DE 1245288 B		NONE	
US 3576062 A	27-04-1971	NONE	
US 4213237 A	22-07-1980	NONE	
DE 3537471 C	08-01-1987	NONE	